


## Box Type Met Polyester Film Capacitor – JFD

### FEATURES


- Non-inductive, plastic case and epoxy resin.
- Box type provides the identical outer appearance.
- High reliability.

### SPECIFICATIONS

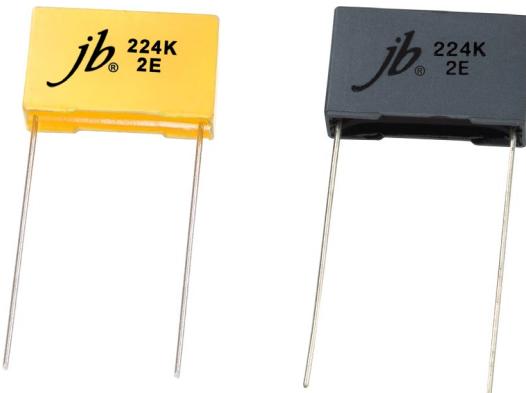

Reference Standard	GB7332 (IEC 60384-2)							
Operating Temperature	-40°C ~ +85°C							
Climatic Category	40/85/21							
Rated Voltage	63V, 100V, 160V, 250V, 400V, 630V.DC							
Capacitance Range	0.001 ~ 2.2 μF							
Capacitance Tolerance	±5%, ±10%, ±20%							
Voltage Proof	1.6U <sub>R</sub> (5s)							
Insulation Resistance	<table border="1"> <tr> <td>U<sub>R</sub>&gt;100V</td> <td>≥7500MΩ, C<sub>R</sub>≤0.33μF ≥2500s, C<sub>R</sub>&gt;0.33μF</td> <td>(20°C, 100V, 1min)</td> </tr> <tr> <td>U<sub>R</sub>≤100V</td> <td>≥3750MΩ, C<sub>R</sub>≤0.33μF ≥1250s, C<sub>R</sub>&gt;0.33μF</td> <td>(20°C, 100V, 1min)</td> </tr> </table>		U <sub>R</sub> >100V	≥7500MΩ, C <sub>R</sub> ≤0.33μF ≥2500s, C <sub>R</sub> >0.33μF	(20°C, 100V, 1min)	U <sub>R</sub> ≤100V	≥3750MΩ, C <sub>R</sub> ≤0.33μF ≥1250s, C <sub>R</sub> >0.33μF	(20°C, 100V, 1min)
U <sub>R</sub> >100V	≥7500MΩ, C <sub>R</sub> ≤0.33μF ≥2500s, C <sub>R</sub> >0.33μF	(20°C, 100V, 1min)						
U <sub>R</sub> ≤100V	≥3750MΩ, C <sub>R</sub> ≤0.33μF ≥1250s, C <sub>R</sub> >0.33μF	(20°C, 100V, 1min)						
Dissipation Factor	<table border="1"> <thead> <tr> <th>Frequency</th> <th>C<sub>R</sub>≤0.1 μF</th> <th>C<sub>R</sub>&gt;0.1 μF</th> </tr> </thead> <tbody> <tr> <td>1KHz</td> <td>≤1.0%</td> <td>≤1.0%</td> </tr> </tbody> </table>		Frequency	C <sub>R</sub> ≤0.1 μF	C <sub>R</sub> >0.1 μF	1KHz	≤1.0%	≤1.0%
Frequency	C <sub>R</sub> ≤0.1 μF	C <sub>R</sub> >0.1 μF						
1KHz	≤1.0%	≤1.0%						

### DRAWING

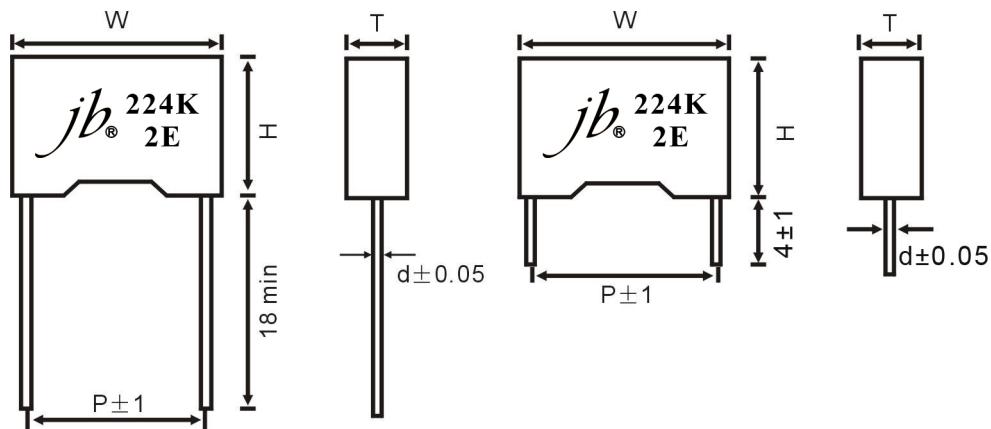

Please visit our website to get more update data, those data & specification are subject to change without notice.

