


## Gold Copper Tube and Film Metallized Polypropylene Capacitors Axial - JGX

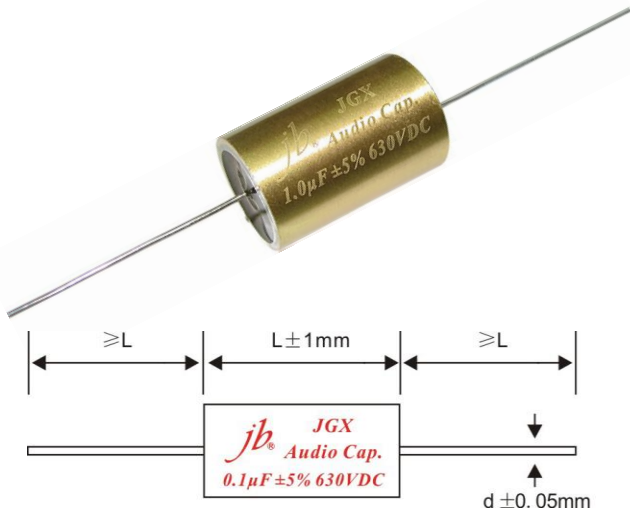

### FEATURES

- Metallized polypropylene film as medium and electrode
- External layer with pure copper tube and epoxy resin sealing
- Markings are laser etched onto the surface.
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance
- Used to the audio instruments, especially for amplifiers.

### SPECIFICATIONS

Passive flammability	GB/T 14004-92 IEC384-6
Operating temperature	-40°C ~ +85°C
Capacitance range	0.047µF ~ 47µF
Capacitance tolerance	J(±5%)
Rated voltage	250V, 630V.DC
Withstand voltage	1.4VR 2S
Dissipation factor	C < 0.1µF ≤ 0.0015 (10KHz)
	0.1µF ≤ C ≤ 1µF ≤ 0.0025 (10KHz)
	C > 1µF ≤ 0.0010 (1KHz)
Insulate the electric resistance	CR ≤ 0.33 µF, I.R ≥ 15,000MΩ
	CR > 0.33 µF, I.R ≥ 5,000S
Leads Diameter	1.0 Tinned Pure Copper Wire

### STANDARD SIZE TABLE (mm)

µF	630V		
	OD	L	d
0.047µF	15	20	1.0
0.1µF	15	20	1.0
0.15µF	15	30	1.0
0.22µF	15	30	1.0
0.33µF	15	30	1.0
0.47µF	20	30	1.0
0.68µF	20	30	1.0
1.0µF	20	30	1.0
1.5µF	20	40	1.0
2.2µF	20	40	1.0
3.3µF	30	55	1.0
4.7µF	30	55	1.0
6.8µF	30	55	1.0
10µF	30	55	1.0
µF	250V		
	OD	L	d
15µF	30	55	1.0
22µF	45	65	1.0
33µF	45	65	1.0
47µF	45	65	1.0

Please visit our website to get more update data, those data & specification are subject to change without notice.