

SMD Aluminum Electrolytic Capacitor – JCA

FEATURES

- Endurance : 105°C 5000H
- Designed for High Voltage
- Designed for reflow soldering
- Designed for surface mounting on high-density PCB



Fig 1



Fig 2



Fig 3

SPECIFICATIONS

Category Temperature Range

-40°C ~ +105°C

Rated Voltage Range

400V.DC

Capacitance Range

1 ~ 22µF

Capacitance Tolerance

±20% (120Hz, 20°C)

Leakage Current

 $I \leq 0.04CV$ (μA) + 100 (μA) after 5 minutesI = Leakage Current (μA) C = Nominal Capacitance (μF) V = Rated Voltage (V)

Dissipation Factor (MAX)

Note: Fig 1 & 2: Diameter 4 ~10mm

Tan δ (20°C, 120Hz)

Fig 3 : Diameter: $\geq 12.5mm$

Endurance

Rated Voltage (V) 400

Shelf Life

Tan δ 0.25

After applying rated working voltage for 5000 hours at $+105^{\circ}C \pm 2^{\circ}C$, and then being stabilized at $+20^{\circ}C$, capacitors shall meet the following limits.

Capacitance Change	Within $\pm 30\%$ of the initial value
Dissipation Factor	Less than 300% of the initial value
Leakage Current	Within the initial limit

Resistance to Soldering Heat

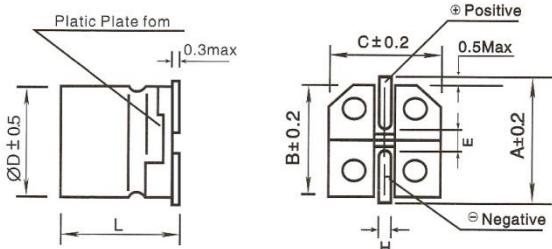
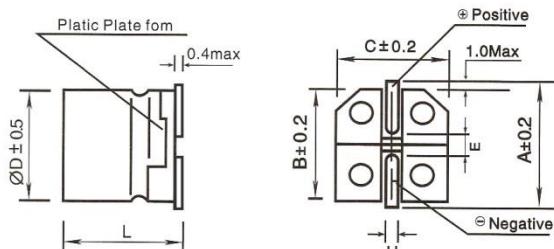
After storage for 1000h at $+105^{\circ}C \pm 2^{\circ}C$ with no voltage applied and then being stabilized at $+20^{\circ}C$, capacitors shall meet the limits specified in endurance.After reflow soldering and then being stabilized at $+20^{\circ}C$, capacitors shall meet the following limits.

Capacitance Change	Within $\pm 10\%$ of initial value
Dissipation Factor	Within the initial limit
Leakage Current	Within the initial limit

Characteristics at Low Temperature

Rated Voltage (V)	400
Z-25°C / Z+20°C	6
Z-40°C / Z+20°C	10

DRAWING (Unit: mm)

Fig. 4 ($\Phi 8 \sim \Phi 10$)Fig. 5 ($\geq \Phi 12.5$)

Surface Marking Types: jbA, UD, VD, JVD

ØD	L	A	B	C	E	H	Fig. No.
8	10.5 ± 0.6	9.1	8.3	8.3	3.1	0.8 ~ 1.1	4
8	12.5 ± 0.6	9.1	8.3	8.3	3.1	0.8 ~ 1.1	4
10	10.5 ± 1.0	11.1	10.3	10.3	4.5	0.8 ~ 1.1	4
10	12.5 ± 1.0	11.1	10.3	10.3	4.5	0.8 ~ 1.1	4

Please visit our website to get more update data, those data & specification are subject to change without notice.

SMD Aluminum Electrolytic Capacitor – JCA

FREQUENCY COEFFICIENT

Frequency	50Hz	120Hz	1kHz	10kHz≤
Coefficient	0.70	1.00	1.30	1.40

STANDARD SIZE

Cap/μF	WV/V	400		
		2G		
2.2	2R2	8x10.5	0.25	15
3.3	3R3	8x10.5	0.25	20
4.7	4R7	8x10.5 (8x12.5) (10x10.5)	0.25 (0.25) (0.25)	25 (30) (30)
5.6	5R6	8x12.5 (10x10.5)	0.25 (0.25)	35 (35)
6.8	6R8	10x10.5	0.25	45
8.2	8R2	10x12.5	0.25	55
10	100	10x12.5	0.25	60
---	---	Case Size ØD×L(mm)	tan δ (120Hz / +20°C)	Rated ripple current (120Hz / +105°C)

Please visit our website to get more update data, those data & specification are subject to change without notice.