

Metallized Polyester Film Capacitor (VAC) – JFC




FEATURES

- Non-inductive, coated with epoxy resin or flame retardant epoxy power.
- High capacitance stability.
- High moisture resistance.
- High reliability with self-healing performance.
- Recommendable for high frequency circuit use.
- Possibility production of special specification.
- Competitive price.

SPECIFICATIONS

Temperature Range	-40°C ~ +85°C
Rated Voltage	250V.AC
Capacitance Range	0.01 ~ 1.5 μF
Capacitance Tolerance	±5%, ±10%, ±20%
Insulation Resistance	2,000MΩ
Dissipation Factor	1% max. (at 1KHz)
Dielectric Strength	175% of rated voltage for 5 sec.

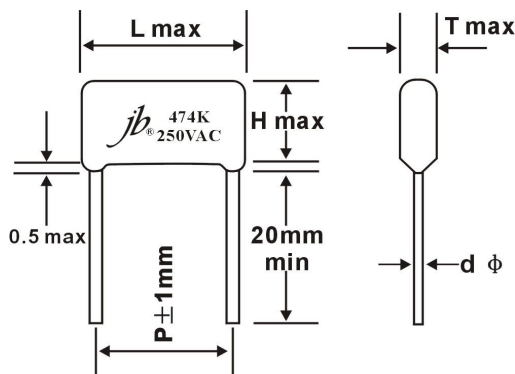

STANDARD SIZE (mm)

VAC Mfd	L	H	T	P	d
0.01	13	8.5	4.2	10	0.6
0.015	13	8.8	4.8	10	0.6
0.018	13	9.3	5	10	0.6
0.022	13	9.5	5.8	10	0.6
0.027	13	8.7	5.3	10	0.6
0.033	13	9	5.8	10	0.6
	18	9	5.2	15	0.8
0.039	13	9	5	10	0.6
	18	9.5	6	15	0.8
0.047	13	9.5	5.5	10	0.6
	18	10	6.5	15	0.8
0.056	13	10.5	6	10	0.6
	18	11.5	6	15	0.8
0.068	13	11.4	6	10	0.6
	18	10.5	6	15	0.8
0.082	13	11	6.2	10	0.6
	18	11.8	7	10	0.6
0.1	18	10.5	5.8	15	0.8
	13	13.5	8	10	0.6
0.15	18	12.5	6.5	15	0.8
	18	13	7.0	15	0.8
0.22	18	14.5	7.5	15	0.8
0.27	18	13.5	7.6	15	0.8
0.33	18	14	8	15	0.8
0.39	23	14.8	9	20	0.8
0.47	23	16	9.8	20	0.8
0.56	23	18	10	20	0.8
0.68	23	19.5	11	20	0.8
0.82	23	21	11.5	20	0.8
1.0	25	21.5	12	22	0.8
	31	23.5	13	27	0.8

Please visit our website to get more update data, those data & specification are subject to change without notice.