

Uncoated Metallized Polyester Film Capacitor (Stacked version) - JFI

Features

- Metallized Polyester Film, Stacked construction, Uncoated
- High impulse and pulse strength

Specifications

Reference standard	GB/T 7332(IEC 60384-2)
Climatic Category	55/125/56
Rated Temperature	85°C
Operating Temperature Range	-55°C~125°C (+85°C to +125°C : decreasing factor 1.25% per °C for UR)
Rated Voltage	63V, 100V, 250V, 400V, 630V, 1000V
Capacitance Range	0.0010μF~10.0μF
Capacitance Tolerance	±5%(J), ±10%(K), ±20%(M)
Voltage Proof	1.40UR(2s)



Dissipation Factor	Frequency	CN ≤ 0.1μF	CN > 0.1μF
	1kHz	≤ 1.0%	≤ 1.0%
	10kHz	≤ 1.5%	-
	100kHz	≤ 3.0%	-


Insulation Resistance	UR ≤ 100V	≥ 3750MΩ, CN ≤ 0.33μF ≥ 1250s, CN > 0.33μF	UR < 100V, charge voltage is 10V UR ≥ 100V, charge voltage is 100V (20°C, 1min)
	UR > 100V	≥ 7500MΩ, CN ≤ 0.33μF ≥ 2500s, CN > 0.33μF	

Maximum Pulse Rise Time(dV/dt) If the working voltage(U) is lower than the rated voltage(UR),the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with UR/U.	UR(V)	dV/dt (V/μs)			
		P=5.0	P=7.5	P=10.0	P=15.0
	63	120	120	--	--
	100	150	150	75	50
	250	250	200	150	100
	400	300	275	175	125
	630	400	320	--	150
	1000	600	400	--	--

Storage Condition
 Temperature: not exceeding 35 °C
 Humidity: not exceeding 75% RH

Dimensions (mm)

Lead Pitch: P ± 1	5.0	7.5	10.0	15.0	22.5	27.5
Lead Diameter: Φd ± 0.05	0.5		0.6	0.8		

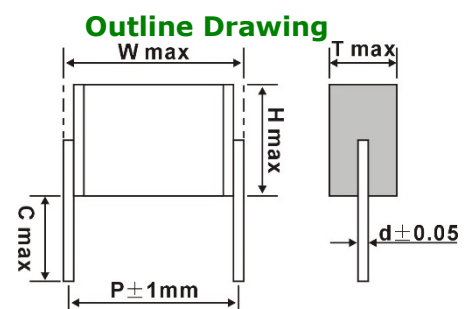

Please visit our website to get more update data, those data & specification are subject to change without notice.

Uncoated Metallized Polyester Film Capacitor (Stacked version) - JFI

Dimensions (mm)

63VDC (40VAC)																		
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	
0.0010	6.5	3.9	2.0	5.0	0.5	0.039	6.5	4.7	2.7	5.0	0.5	0.22	9.0	4.0	2.4	7.5	0.5	
0.0012	6.5	4.0	2.2	5.0	0.5	0.047	6.5	4.0	2.0	5.0	0.5	0.27	9.0	4.6	2.5	7.5	0.5	
0.0015	6.5	5.0	2.2	5.0	0.5	0.056	6.5	4.1	2.2	5.0	0.5	0.33	9.0	5.1	2.7	7.5	0.5	
0.0018	6.5	4.9	2.5	5.0	0.5	0.068	6.5	4.1	2.5	5.0	0.5	0.39	9.0	5.9	2.7	7.5	0.5	
0.0022	6.5	4.7	2.2	5.0	0.5	0.082	6.5	4.4	2.7	5.0	0.5	0.47	9.0	5.2	2.7	7.5	0.5	
0.0027	6.5	4.7	2.5	5.0	0.5	0.10	6.5	3.8	2.0	5.0	0.5	0.56	9.0	6.2	2.7	7.5	0.5	
0.0033	6.5	5.2	2.7	5.0	0.5	0.12	6.5	3.9	2.2	5.0	0.5	0.68	9.0	5.9	3.2	7.5	0.5	
0.0039	6.5	3.8	2.0	5.0	0.5	0.15	6.5	4.8	2.2	5.0	0.5	0.82	9.0	5.9	3.7	7.5	0.5	
0.0047	6.5	3.9	2.2	5.0	0.5	0.18	6.5	4.9	2.4	5.0	0.5	1.0	9.0	6.2	4.2	7.5	0.5	
0.0056	6.5	4.6	2.2	5.0	0.5	0.22	6.5	4.2	2.5	5.0	0.5	1.2	9.0	6.4	4.8	7.5	0.5	
0.0068	6.5	4.6	2.5	5.0	0.5	0.27	6.5	4.6	2.7	5.0	0.5	1.5	9.0	7.1	5.4	7.5	0.5	
0.0082	6.5	5.0	2.7	5.0	0.5	0.33	6.5	5.1	2.9	5.0	0.5	1.8	9.0	7.6	5.7	7.5	0.5	
0.010	6.5	3.7	2.0	5.0	0.5	0.39	6.5	5.2	3.2	5.0	0.5	2.2	9.0	8.5	6.3	7.5	0.5	
0.012	6.5	4.1	2.0	5.0	0.5	0.47	6.5	5.2	3.7	5.0	0.5	2.7	9.0	9.6	6.7	7.5	0.5	
0.015	6.5	3.6	2.5	5.0	0.5	0.56	6.5	7.4	3.2	5.0	0.5	3.3	9.0	11.2	7.3	7.5	0.5	
0.018	6.5	4.3	2.5	5.0	0.5	0.68	6.5	7.5	3.7	5.0	0.5	3.9	9.0	11.3	8.3	7.5	0.5	
0.022	6.5	4.2	2.0	5.0	0.5	0.82	6.5	7.7	4.2	5.0	0.5	4.7	9.0	11.8	9.3	7.5	0.5	
0.027	6.5	4.4	2.2	5.0	0.5	1.0	6.5	8.4	4.7	5.0	0.5	5.6	9.0	13.0	10.2	7.5	0.5	
0.033	6.5	4.4	2.5	5.0	0.5							6.8	9.0	13.5	11.7	7.5	0.5	

100VDC (63VAC)																		
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	
0.0010	6.5	3.9	2.0	5.0	0.5	0.18	6.5	4.9	2.4	5.0	0.5	0.33	11.5	4.0	2.5	10.0	0.5	
0.0012	6.5	4.0	2.2	5.0	0.5	0.22	6.5	4.7	2.9	5.0	0.5	0.39	11.5	4.7	2.5	10.0	0.5	
0.0015	6.5	5.0	2.2	5.0	0.5	0.27	6.5	5.0	3.2	5.0	0.5	0.47	11.5	5.0	2.7	10.0	0.5	
0.0018	6.5	4.9	2.5	5.0	0.5	0.33	6.5	5.1	3.7	5.0	0.5	0.56	11.5	4.7	3.2	10.0	0.5	
0.0022	6.5	4.7	2.2	5.0	0.5	0.39	6.5	7.2	3.2	5.0	0.5	0.68	11.5	5.7	3.2	10.0	0.5	
0.0027	6.5	4.7	2.5	5.0	0.5	0.47	6.5	7.2	3.7	5.0	0.5	0.82	11.5	5.7	3.7	10.0	0.5	
0.0033	6.5	5.2	2.7	5.0	0.5	0.56	6.5	7.3	4.2	5.0	0.5	1.0	11.5	5.9	4.2	10.0	0.5	
0.0039	6.5	3.8	2.0	5.0	0.5	0.68	6.5	7.9	4.7	5.0	0.5	1.2	11.5	7.1	4.2	10.0	0.5	
0.0047	6.5	3.9	2.2	5.0	0.5	0.82	6.5	8.2	5.3	5.0	0.5	1.5	11.5	7.7	4.7	10.0	0.5	
0.0056	6.5	4.6	2.2	5.0	0.5	1.0	6.5	8.5	5.7	5.0	0.5	1.8	11.5	8.3	5.2	10.0	0.5	
0.0068	6.5	4.6	2.5	5.0	0.5	0.10	9.0	4.1	2.4	7.5	0.5	2.2	11.5	9.1	5.7	10.0	0.5	
0.0082	6.5	5.0	2.7	5.0	0.5	0.12	9.0	4.2	2.7	7.5	0.5	1.0	16.5	6.1	3.2	15.0	0.6	
0.010	6.5	3.7	2.0	5.0	0.5	0.15	9.0	5.2	2.7	7.5	0.5	1.2	16.5	5.9	3.7	15.0	0.6	
0.012	6.5	4.1	2.0	5.0	0.5	0.18	9.0	3.8	2.2	7.5	0.5	1.5	16.5	6.6	4.2	15.0	0.6	
0.015	6.5	3.6	2.5	5.0	0.5	0.22	9.0	4.0	2.4	7.5	0.5	1.8	16.5	7.5	4.4	15.0	0.6	
0.018	6.5	4.3	2.5	5.0	0.5	0.27	9.0	4.2	2.7	7.5	0.5	2.2	16.5	7.5	5.2	15.0	0.6	
0.022	6.5	4.2	2.0	5.0	0.5	0.33	9.0	5.1	2.7	7.5	0.5	2.7	16.5	8.5	5.5	15.0	0.6	
0.027	6.5	4.4	2.2	5.0	0.5	0.39	9.0	5.9	2.7	7.5	0.5	3.3	16.5	9.3	6.0	15.0	0.6	
0.033	6.5	4.4	2.5	5.0	0.5	0.47	9.0	5.7	3.2	7.5	0.5	3.9	16.5	10.5	6.2	15.0	0.6	
0.039	6.5	4.7	2.7	5.0	0.5	0.56	9.0	5.6	3.7	7.5	0.5	4.7	16.5	10.8	7.0	15.0	0.6	
0.047	6.5	4.0	2.0	5.0	0.5	0.68	9.0	5.8	4.2	7.5	0.5	5.6	16.5	11.9	7.6	15.0	0.6	
0.056	6.5	4.1	2.2	5.0	0.5	0.82	9.0	7.0	4.2	7.5	0.5	6.8	16.5	12.4	8.7	15.0	0.6	
0.068	6.5	4.1	2.5	5.0	0.5	1.0	9.0	7.4	4.7	7.5	0.5	8.2	16.5	13.1	9.7	15.0	0.6	
0.082	6.5	4.4	2.7	5.0	0.5	1.2	9.0	7.4	5.5	7.5	0.5	10.0	16.5	14.5	10.6	15.0	0.6	
0.10	6.5	3.8	2.0	5.0	0.5	1.5	9.0	8.0	6.3	7.5	0.5							
0.12	6.5	3.9	2.2	5.0	0.5	1.8	9.0	9.7	6.2	7.5	0.5							
0.15	6.5	4.8	2.2	5.0	0.5	2.2	9.0	10.3	7.2	7.5	0.5							

Please visit our website to get more update data, those data & specification are subject to change without notice.

Uncoated Metallized Polyester Film Capacitor (Stacked version) - JFI

250VDC (160VAC)																	
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d
0.0010	6.5	3.9	2.0	5.0	0.5	0.082	6.5	4.7	3.5	5.0	0.5	0.15	11.5	6.4	3.2	10.0	0.5
0.0012	6.5	4.0	2.2	5.0	0.5	0.10	6.5	5.3	3.7	5.0	0.5	0.18	11.5	5.2	3.2	10.0	0.5
0.0015	6.5	5.0	2.2	5.0	0.5	0.12	6.5	6.7	3.5	5.0	0.5	0.22	11.5	5.3	3.7	10.0	0.5
0.0018	6.5	4.9	2.5	5.0	0.5	0.15	6.5	6.7	4.2	5.0	0.5	0.27	11.5	5.5	4.2	10.0	0.5
0.0022	6.5	4.7	2.2	5.0	0.5	0.033	9.0	3.5	2.2	7.5	0.5	0.33	11.5	6.1	4.5	10.0	0.5
0.0027	6.5	4.7	2.5	5.0	0.5	0.039	9.0	4.1	2.2	7.5	0.5	0.39	11.5	6.5	4.9	10.0	0.5
0.0033	6.5	5.2	2.7	5.0	0.5	0.047	9.0	4.1	2.5	7.5	0.5	0.47	11.5	7.5	5.2	10.0	0.5
0.0039	6.5	3.8	2.0	5.0	0.5	0.056	9.0	4.4	2.7	7.5	0.5	0.22	16.5	4.6	3.2	15.0	0.6
0.0047	6.5	3.9	2.2	5.0	0.5	0.068	9.0	5.3	2.7	7.5	0.5	0.27	16.5	5.6	3.2	15.0	0.6
0.0056	6.5	4.6	2.2	5.0	0.5	0.082	9.0	4.3	2.7	7.5	0.5	0.33	16.5	5.6	3.7	15.0	0.6
0.0068	6.5	4.6	2.5	5.0	0.5	0.10	9.0	4.6	3.0	7.5	0.5	0.39	16.5	6.6	3.7	15.0	0.6
0.0082	6.5	5.0	2.7	5.0	0.5	0.12	9.0	5.0	3.2	7.5	0.5	0.47	16.5	6.7	4.2	15.0	0.6
0.010	6.5	3.7	2.0	5.0	0.5	0.15	9.0	5.2	3.7	7.5	0.5	0.56	16.5	6.8	4.7	15.0	0.6
0.012	6.5	4.1	2.0	5.0	0.5	0.18	9.0	5.8	3.9	7.5	0.5	0.68	16.5	7.3	5.5	15.0	0.6
0.015	6.5	3.6	2.5	5.0	0.5	0.22	9.0	6.4	4.2	7.5	0.5	0.82	16.5	8.8	5.5	15.0	0.6
0.018	6.5	4.3	2.5	5.0	0.5	0.27	9.0	6.8	4.7	7.5	0.5	1.0	16.5	9.6	6.0	15.0	0.6
0.022	6.5	4.2	2.0	5.0	0.5	0.33	9.0	6.9	5.5	7.5	0.5	1.2	16.5	10.0	6.7	15.0	0.6
0.027	6.5	4.4	2.2	5.0	0.5	0.047	11.5	3.8	2.2	10.0	0.5	1.5	16.5	11.8	7.0	15.0	0.6
0.033	6.5	4.4	2.5	5.0	0.5	0.056	11.5	4.1	2.2	10.0	0.5	1.8	16.5	13.1	7.5	15.0	0.6
0.039	6.5	4.7	2.7	5.0	0.5	0.068	11.5	4.1	2.5	10.0	0.5	2.2	16.5	12.8	9.0	15.0	0.6
0.047	6.5	3.8	2.7	5.0	0.5	0.082	11.5	4.4	2.7	10.0	0.5	2.7	16.5	13.9	10.2	15.0	0.6
0.056	6.5	4.1	2.9	5.0	0.5	0.10	11.5	5.4	2.7	10.0	0.5	3.3	16.5	15.3	11.2	15.0	0.6

400VDC (200VAC)																	
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d
0.0010	6.5	3.9	2.0	5.0	0.5	0.0022	9.0	3.7	2.2	7.5	0.5	0.033	11.5	4.3	2.2	10.0	0.5
0.0012	6.5	4.0	2.2	5.0	0.5	0.0027	9.0	4.6	2.2	7.5	0.5	0.039	11.5	4.2	2.5	10.0	0.5
0.0015	6.5	5.0	2.2	5.0	0.5	0.0033	9.0	3.8	2.2	7.5	0.5	0.047	11.5	4.5	2.7	10.0	0.5
0.0018	6.5	4.9	2.5	5.0	0.5	0.0039	9.0	3.9	2.2	7.5	0.5	0.056	11.5	5.4	2.7	10.0	0.5
0.0022	6.5	4.7	2.2	5.0	0.5	0.0047	9.0	4.7	2.2	7.5	0.5	0.068	11.5	5.2	3.2	10.0	0.5
0.0027	6.5	4.7	2.5	5.0	0.5	0.0056	9.0	3.7	2.2	7.5	0.5	0.082	11.5	6.2	3.2	10.0	0.5
0.0033	6.5	5.2	2.7	5.0	0.5	0.0068	9.0	4.5	2.2	7.5	0.5	0.10	11.5	6.2	3.7	10.0	0.5
0.0039	6.5	3.8	2.0	5.0	0.5	0.0082	9.0	4.5	2.5	7.5	0.5	0.12	11.5	6.4	4.2	10.0	0.5
0.0047	6.5	3.9	2.2	5.0	0.5	0.010	9.0	4.0	2.2	7.5	0.5	0.15	11.5	6.9	4.7	10.0	0.5
0.0056	6.5	4.6	2.2	5.0	0.5	0.012	9.0	4.4	2.2	7.5	0.5	0.18	11.5	7.5	5.2	10.0	0.5
0.0068	6.5	4.6	2.5	5.0	0.5	0.015	9.0	4.5	2.5	7.5	0.5	0.22	11.5	8.2	5.7	10.0	0.5
0.0082	6.5	5.0	2.7	5.0	0.5	0.018	9.0	3.7	2.2	7.5	0.5	0.047	16.5	4.1	2.4	15.0	0.6
0.010	6.5	3.7	2.0	5.0	0.5	0.022	9.0	4.2	2.2	7.5	0.5	0.056	16.5	4.0	2.7	15.0	0.6
0.012	6.5	4.1	2.0	5.0	0.5	0.027	9.0	4.2	2.5	7.5	0.5	0.068	16.5	4.3	2.9	15.0	0.6
0.015	6.5	4.3	2.2	5.0	0.5	0.033	9.0	4.6	2.7	7.5	0.5	0.082	16.5	4.5	3.2	15.0	0.6
0.018	6.5	4.3	2.5	5.0	0.5	0.039	9.0	5.4	2.7	7.5	0.5	0.10	16.5	5.5	3.2	15.0	0.6
0.022	6.5	4.7	2.7	5.0	0.5	0.047	9.0	6.1	2.8	7.5	0.5	0.12	16.5	5.3	3.7	15.0	0.6
0.027	6.5	5.2	2.9	5.0	0.5	0.056	9.0	6.1	3.2	7.5	0.5	0.15	16.5	6.2	3.9	15.0	0.6
0.033	6.5	5.5	3.2	5.0	0.5	0.068	9.0	6.1	3.7	7.5	0.5	0.18	16.5	6.7	4.2	15.0	0.6
0.039	6.5	5.4	3.7	5.0	0.5	0.082	9.0	6.3	4.2	7.5	0.5	0.22	16.5	7.1	4.7	15.0	0.6
0.047	6.5	6.9	3.5	5.0	0.5	0.10	9.0	7.2	4.4	7.5	0.5	0.27	16.5	7.6	5.5	15.0	0.6
0.056	6.5	7.7	3.7	5.0	0.5	0.12	9.0	7.1	5.2	7.5	0.5	0.33	16.5	8.5	5.9	15.0	0.6
0.068	6.5	7.9	4.2	5.0	0.5	0.15	9.0	7.9	5.7	7.5	0.5	0.39	16.5	9.4	6.2	15.0	0.6
0.082	6.5	8.6	4.7	5.0	0.5	0.010	11.5	3.9	2.2	10.0	0.5	0.47	16.5	9.8	7.0	15.0	0.6
0.10	6.5	8.3	5.7	5.0	0.5	0.012	11.5	4.4	2.2	10.0	0.5	0.56	16.5	10.7	7.5	15.0	0.6
0.0010	9.0	3.7	2.0	7.5	0.5	0.015	11.5	4.5	2.5	10.0	0.5	0.68	16.5	11.2	8.5	15.0	0.6
0.0012	9.0	3.7	2.0	7.5	0.5	0.018	11.5	4.8	2.7	10.0	0.5	0.82	16.5	12.6	9.0	15.0	0.6
0.0015	9.0	4.0	2.2	7.5	0.5	0.022	11.5	4.6	2.5	10.0	0.5	1.0	16.5	13.6	10.2	15.0	0.6
0.0018	9.0	4.7	2.2	7.5	0.5	0.027	11.5	5.6	2.5	10.0	0.5						

Please visit our website to get more update data, those data & specification are subject to change without notice.

Uncoated Metallized Polyester Film Capacitor (Stacked version) - JFI

630VDC (400VAC)																		
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	
0.0010	6.5	3.9	2.0	5.0	0.5	0.0010	9.0	3.7	2.0	7.5	0.5	0.10	16.5	9.2	5.0	15.0	0.6	
0.0012	6.5	4.0	2.2	5.0	0.5	0.0012	9.0	3.7	2.0	7.5	0.5	0.12	16.5	9.8	5.8	15.0	0.6	
0.0015	6.5	5.0	2.2	5.0	0.5	0.0015	9.0	4.0	2.2	7.5	0.5	0.15	16.5	11.2	6.2	15.0	0.6	
0.0018	6.5	4.9	2.5	5.0	0.5	0.0018	9.0	4.7	2.2	7.5	0.5	0.18	16.5	11.2	7.2	15.0	0.6	
0.0022	6.5	4.7	2.2	5.0	0.5	0.0022	9.0	3.7	2.2	7.5	0.5	0.22	16.5	12.5	7.7	15.0	0.6	
0.0027	6.5	4.7	2.5	5.0	0.5	0.0027	9.0	4.0	2.4	7.5	0.5	0.27	16.5	14.3	8.2	15.0	0.6	
0.0033	6.5	5.2	2.7	5.0	0.5	0.0033	9.0	3.8	2.2	7.5	0.5	0.33	16.5	14.4	9.9	15.0	0.6	
0.0039	6.5	5.5	2.9	5.0	0.5	0.0039	9.0	3.9	2.2	7.5	0.5	0.39	16.5	15.2	10.9	15.0	0.6	
0.0047	6.5	4.9	2.5	5.0	0.5	0.0047	9.0	4.1	2.4	7.5	0.5	0.47	16.5	17.5	11.3	15.0	0.6	
0.0056	6.5	5.2	2.7	5.0	0.5	0.0056	9.0	4.6	2.5	7.5	0.5							
0.0068	6.5	5.0	3.2	5.0	0.5	0.0068	9.0	5.0	2.7	7.5	0.5							
0.0082	6.5	5.4	3.5	5.0	0.5	0.0082	9.0	6.1	2.7	7.5	0.5							
0.010	6.5	5.7	3.9	5.0	0.5	0.010	9.0	6.2	3.2	7.5	0.5							
0.012	6.5	7.3	3.7	5.0	0.5	0.012	9.0	5.8	3.7	7.5	0.5							
						0.015	9.0	6.2	4.2	7.5	0.5							
						0.018	9.0	7.4	4.2	7.5	0.5							
						0.022	9.0	7.9	4.7	7.5	0.5							
						0.027	9.0	7.8	5.7	7.5	0.5							
						0.033	9.0	9.5	5.7	7.5	0.5							
						0.039	9.0	10.2	6.3	7.5	0.5							
						0.047	9.0	11.2	6.8	7.5	0.5							

1000VDC (600VAC)																		
μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	μF	W max	H max	T max	P	d	
0.0010	6.5	3.9	2.0	5.0	0.5	0.0010	9.0	3.7	2.0	7.5	0.5	0.012	9.0	7.3	4.7	7.5	0.5	
0.0012	6.5	4.0	2.2	5.0	0.5	0.0012	9.0	3.7	2.0	7.5	0.5	0.015	9.0	8.1	5.2	7.5	0.5	
0.0015	6.5	5.0	2.2	5.0	0.5	0.0015	9.0	4.0	2.2	7.5	0.5	0.018	9.0	9.7	5.2	7.5	0.5	
0.0018	6.5	4.9	2.5	5.0	0.5	0.0018	9.0	4.7	2.2	7.5	0.5	0.022	9.0	10.6	5.7	7.5	0.5	
0.0022	6.5	4.7	2.2	5.0	0.5	0.0022	9.0	3.7	2.2	7.5	0.5	0.027	9.0	11.8	6.3	7.5	0.5	
0.0027	6.5	4.7	2.5	5.0	0.5	0.0027	9.0	4.6	2.2	7.5	0.5	0.033	9.0	13.2	6.8	7.5	0.5	
0.0033	6.5	5.2	2.7	5.0	0.5	0.0033	9.0	4.6	2.5	7.5	0.5							
0.0039	6.5	5.5	2.9	5.0	0.5	0.0039	9.0	4.9	2.7	7.5	0.5							
0.0047	6.5	5.8	3.2	5.0	0.5	0.0047	9.0	5.8	2.7	7.5	0.5							
0.0056	6.5	5.8	3.7	5.0	0.5	0.0056	9.0	5.5	3.2	7.5	0.5							
0.0068	6.5	8.4	3.2	5.0	0.5	0.0068	9.0	6.7	3.2	7.5	0.5							
0.0082	6.5	8.4	3.7	5.0	0.5	0.0082	9.0	6.7	3.7	7.5	0.5							
0.010	6.5	8.8	4.2	5.0	0.5	0.010	9.0	7.0	4.2	7.5	0.5							

Please visit our website to get more update data, those data & specification are subject to change without notice.