

Music Aluminum Foil and Film Metallized Polypropylene Capacitors – Axial – JMX




FEATURES

- Top of the range pure aluminum foil capacitor
- Very Low Dielectric absorption factor
- Very Low Dissipation factor, Very Low ESR, Very Low Inductance

SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	0.01 ~ 0.47µF
Capacitance tolerance	±5% 1KHz
Rated voltage	630VDC
Withstand voltage	1.6VR 5S
Dissipation factor	≤0.0002 1KHz
Insulate the electric resistance	CR ≤ 0.33 µF, I.R ≥ 15,000MΩ CR > 0.33 µF, I.R ≥ 5,000S
Leads Diameter	Tinned Pure Copper Wire

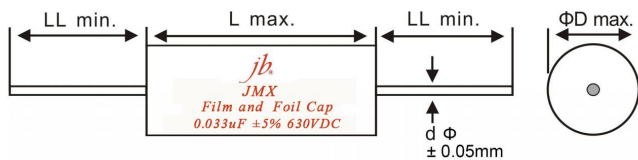

STANDARD SIZE TABLE (mm)

µF	630V				
	Dissipation	OD	L	d	LL
0.01µF	≤0.0002	7.5	25	0.8	38
0.022µF	≤0.0002	8	25	0.8	38
0.033µF	≤0.0002	9	25	0.8	38
0.047µF	≤0.0002	10	25	0.8	38
0.068µF	≤0.0002	11	31.5	0.8	38
0.1µF	≤0.0002	13	31.5	0.8	38
0.22µF	≤0.0002	17.5	31.5	0.8	38
0.33µF	≤0.0002	21	31.5	0.8	38
0.47µF	≤0.0002	20.5	36	0.8	38

Please visit our website to get more update data, those data & specification are subject to change without notice.