

Aluminum Electrolytic Capacitor – JSU




FEATURES

- For Photo Flash
- High Stability
- Compact and light weight

SPECIFICATIONS

Items	Performance Characteristics	
Operating Temperature Range	-20°C ~ +55°C	
Rated Voltage	330WV.DC	360WV.DC
Voltage Proof	350SV.DC	390SV.DC
Capacitance Tolerance (20°C,	-10% ~ +20%	
Dissipation Factor (20°C,	Capacitance : 150~600µF	Less than 0.1
120Hz)	: 700~1500µF	Less than 0.15
Leakage Current	I=1xC (20°C, after 5 minutes) Max	
	I: Leakage Current (µA)	C: Rated Capacitance (µF)

DIMENSIONS (mm)

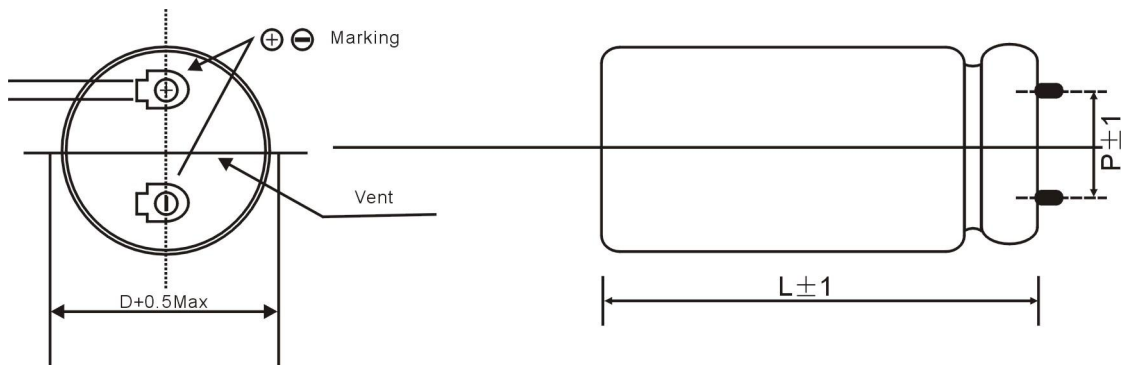

STANDARD RATINGS

330WV.DC (350SV.DC)							360WV.DC (390SV.DC)							
Capacitance	ΦD(mm)	20	22	25	30	35	Capacitance	ΦD(mm)	20	22	25	30	35	
(µF)	P	8	10	10	10	10	(µF)	P	8	10	10	10	10	
150	L (mm)	25	--	--	--	--	150	L (mm)	30	25	--	--	--	
180		30	25	--	--	--	180		35	30	25	--	--	--
200		35	30	25	--	--	200		35	30	30	--	--	--
250		40	30	30	--	--	250		40	35	30	25	--	--
300		45	35	30	25	--	300		50	40	35	30	--	--
350		50	40	35	25	--	350		--	45	40	30	25	--
400		--	45	40	30	25	400		--	50	45	35	25	--
450		--	50	45	30	25	450		--	--	50	35	30	--
500		--	--	50	35	25	500		--	--	60	40	30	--
600		--	--	55	35	30	600		--	--	--	40	35	--
700		--	--	--	40	30	700		--	--	--	45	35	--
800		--	--	--	45	35	800		--	--	--	50	40	--
900		--	--	--	45	35	900		--	--	--	60	40	--
1000		--	--	--	50	40	1000		--	--	--	60	45	--
1200		--	--	--	60	45	1200		--	--	--	--	50	--
1300		--	--	--	--	45	1300		--	--	--	--	55	--
1500	--	--	--	--	50	1500	--	--	--	--	60	--		

Please visit our website to get more update data, those data & specification are subject to change without notice.